Package contents (parts are not to scale):

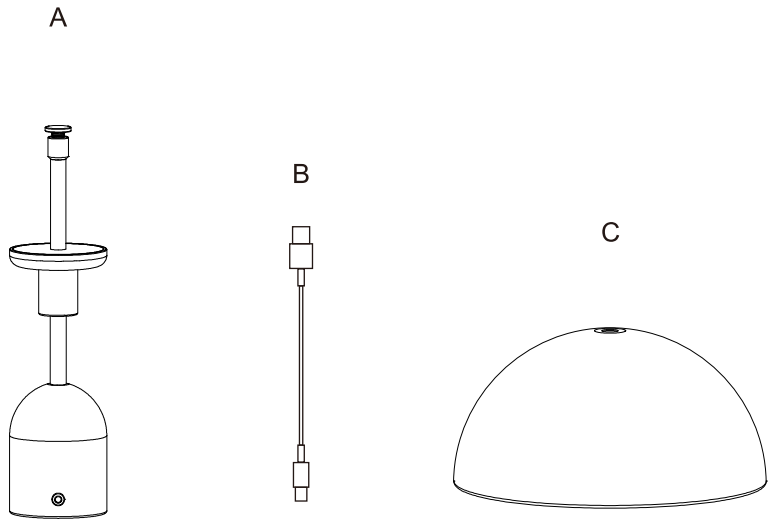

Part	Description	Quantity
A	The fixture	1
B	Type-C cable	1
C	Metal shade	1

Care and Cleaning

EXTERIOR MAINTENANCE

1. To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

2. Do not use any cleaners with chemicals, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOVA LIFE

INSTRUCTIONS MANUAL
for MYCENA

INTERIOR TABLE LAMP

Art Nr. 23313-030-49,23314-030-44
21000-030-67,21000-030-69
21002-030-42,21003-030-51
21003-030-69

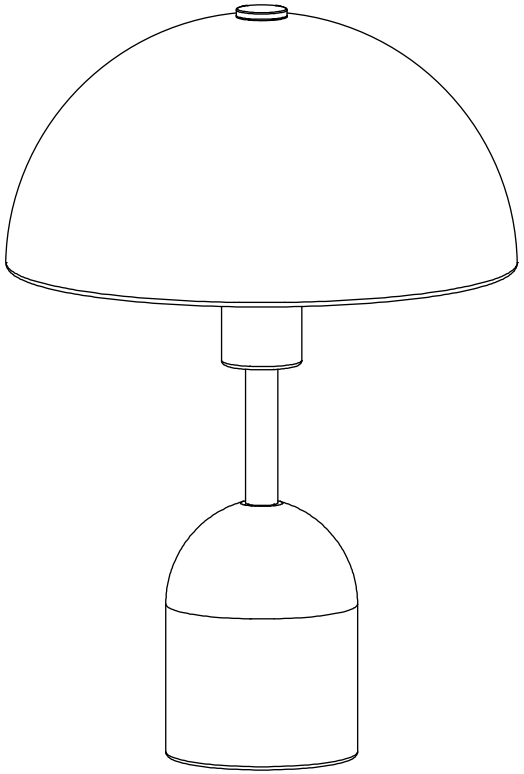

www.lampehuset.no

Pre-Installation

PLANNING THE INSTALLATION

Read all instructions before assembly and installation. Before starting installation of the fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. To avoid damaging this product, assemble it on a soft, non-abrasive surface such as carpet or cardboard.

TOOLS REQUIRED

Knife

Product detail information:

Voltage :DC3.7V

Switch: Touch ON/OFF

Colour temperature:3000K

Luminaire connected wattage : 1.6W,Luminaire luminous flux:290lm

Battery type: 3600mAh 18650 Li-ion battery

TYPE C charge time: 4~5hrs discharge time : 8~9hrs(50% light intensity)

Recharge: input DC 5V 1A(exclude adaptor)

With Touch dim On-100%-50%-20%-Off, long touch for stepless dimming 20%-100%

Safety: Class III

Battery life guarantee 1 years

(with 600times recharging, it means after 600times it could not be "100% full filled" but still could be recharged)

Switch instruction:

1.Please use the bottom TYPE C charging port to charge before use, When charging the indicator is red.When charging is completed the indicator is green.

2. Touch the on/off button on the side of the lamp base to adjust the brightness from 100% to 50% and 20% by each touching.

3. To adjust the brightness touch the on/off button on the side of the lamp base.

Long press on the on/off button wil adjust the brightness from high to low. Release wanted brightness is reached. To increase the brightness again you need to long press the on/off button again.Press once to exit the brightness program.
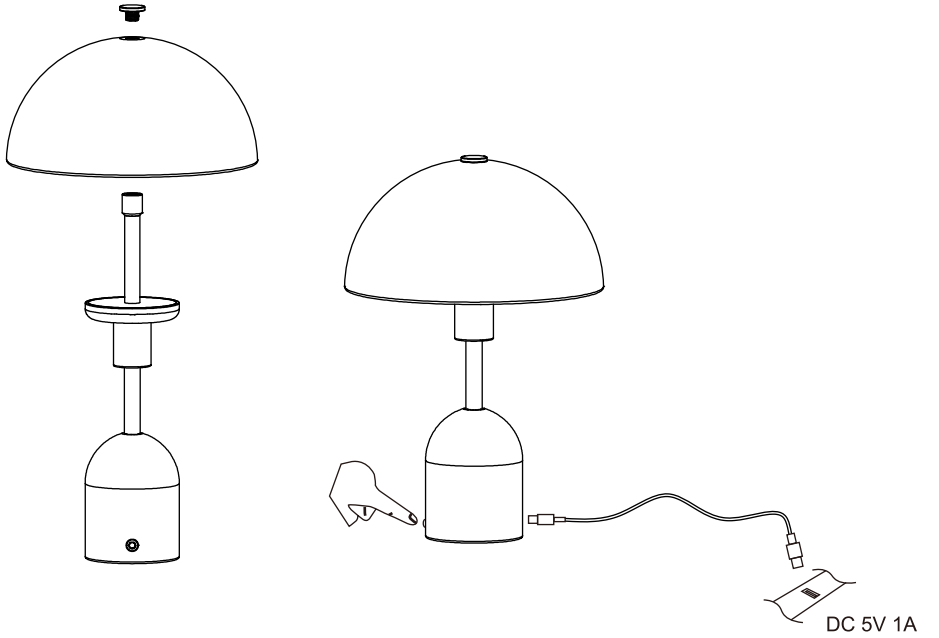
Installation