


Package contents (parts are not to scale):

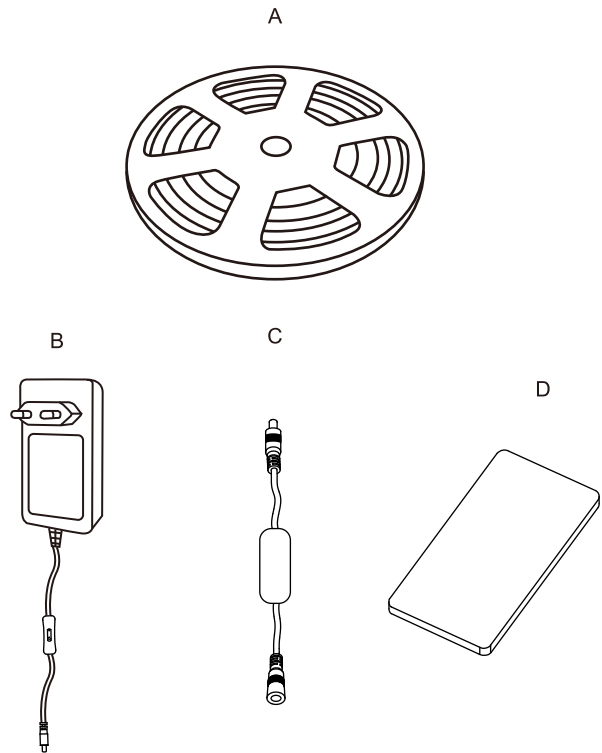

Part	Description	Quantity
A	Flexible led strip	1
B	LED driver plug	1
C	LED controller	1
D	Remote control unit	1

FLEXIBLE LED STRIP

Art Nr. 06001-005-53



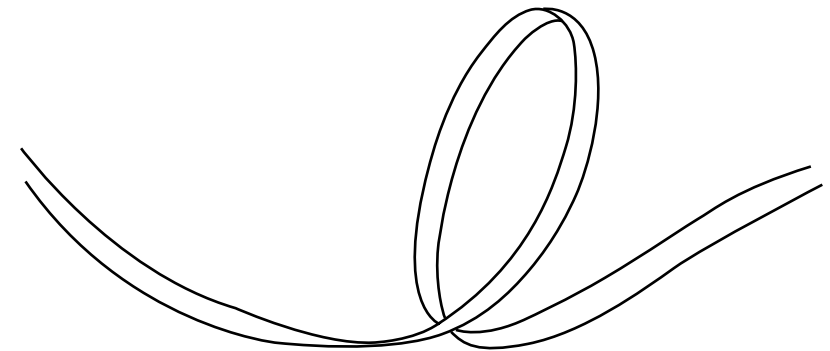


Diagram of Easy Set components

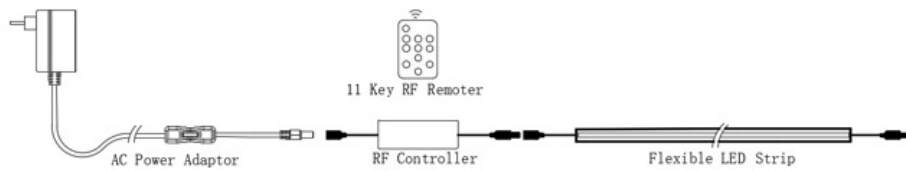

Operation Instructions

1. Open the package and check to see if any parts are broken. If in good condition, connect the power supply, light strip and controller according to the picture above.
2. Plug the power adapter input plug into the power supply socket , the light strip will light up, you can use the RF remote control light strip to adjust the brightness and mode .The function of the remote control button is illustrated as follows picture.

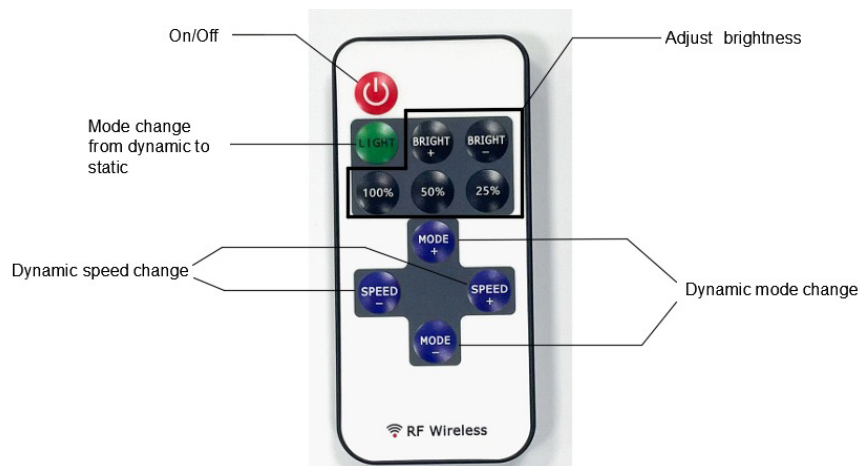

Product parameters

Adaptor parameters

Input Voltage:100-240V AC 50/60HZ 1.2A Max
Output Voltage: 24V DC 2.5A 60W
Waterproof rating: IP20

Controller parameters

Power supply voltage:DC5-24V
Output: 1CH 6A Max
Dynamic modes: 8
Remote distance:15M at open area

Led strip parameters

Input Voltage: DC 24V 27W
Lumen: 860Lm/M
LED Color: 3000K
CRI>90
Dimension:5000*5mm

Cautions

1. Before power on the production, ensure that all wiring is correct to avoid damage to the lighting fixtures due to wiring errors.
2. This product are not waterproof and should be protected from sunlight and rain. If installed outdoors, please use a waterproof box.
3. Good heat dissipation conditions can prolong the service life of LED controllers. Please install the product in a well ventilated environment.
4. To ensure the effectiveness of remote control, please use it within the specified distance and avoid obstruction.
5. Please do not install or use such products in situations with lightning, strong magnetic fields, or high voltage.